


LUXURY VINYL TILES LVT PODOVI

Dizajn-luksuzne podne obloge (LVT) od vinil dasaka i ploča autentično prate najnovije trendove u drvnim, kamenim i apstraktnim dezenima. Kolekcije sadrže poliuretansku zaštitu (PUR) koja pruža pogodnosti manjeg održavanja, a pogodne za upotrebu u komercijalnim i stambenim prostorima.

Expona Commercial PUR	29
Expona Design PUR	32
Expona Domestic PUR	34
Cavalio 0.33 PU	36
Cavalio 0.5 PU	38
LVT Umetne trake / fuge	39

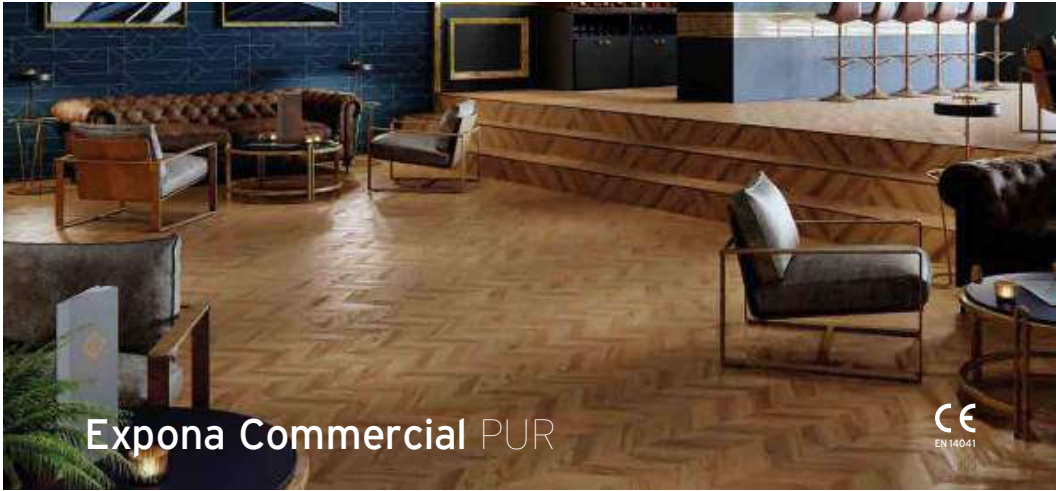

Tehnička specifikacija

Format proizvoda		
Debljina	ISO 24346 (EN 428)	2.5mm
Debljina habajućeg sloja	ISO 24340 (EN 429)	0.55mm
Ukupna težina	ISO 23997 (EN 430)	4290g/m²
Površinski tretman	PUR	
Tehničke performanse		
General Performance	ISO 10582 (EN 649)	Conforms
Klasifikacija	ISO 10874 (EN 685)	23, 33, 42
Otpornost na klizanje	EN 13893 DIN 51130	Class DS R10
Sadržaj veziva	ISO 10582	Type I
Otpornost na habanje	EN 649	Group T
Reakcija na vatru	EN 13501-1 CAN/ULC S102.2	Class Bfl-S1 FSV < 300; SDV < 500
Elektrostatička otpornost	EN 1815	≤2.0kV Classified as 'antistatic'
Zaostala ulegnuća	ISO 24343-1 (EN 433)	≤0.05mm*
Otpornost na točkice stolica	ISO 4918 (EN 425)	Pogodno
Dimenzionalna stabilnost	ISO 23999 (EN 434)	≤0.1% max
Podno grejanje	Pogodno, max 27°C	
Postojanost boje - svetlost	ISO 105-B02	(Method 3) >6

*Prosečna vrednost testa iz trenutne proizvodnje.

Veličina daski i ploča

Format	Veličina	Količina po kutiji	Pokrivenost
Ploča	Size Mix	36	3.62m²
	101.6mm x 914.4mm	36	3.34m²
	152.4mm x 914.4mm	24	3.34m²
	152.4mm x 1219.2mm	18	3.34m²
	184.2mm x 1219.2mm	15	3.37m²
	203.2mm x 1219.2mm	14	3.46m²
	184.2mm x 1524mm	12	3.37m²

Održivost i uticaj na kvalitet vazduha		
BRE Green Guide	A+ ENP 429	
GreenTag	LCA Rate Gold Plus	GreenRate level A
Specific EN 15804 EPD	Available	
Recyclable	100%	
Recycled Content	40%	
REACH	Compliant	
Indoor Air Comfort Gold	Eurofins certified product	
FloorScore	Certified	
Finnish M1	Certified	
AgBB/ABG	Pass	
Responsible Sourcing	BES 6001 SA 8000	Very good Approved factory

Akustične performanse		
Smanjenje zvuka udara	ISO 10140-3	2dB
Performanse održavanje		
Otpornost na hemikalije	ISO 26987 (EN 423)	Dobra otpornost
Redovno dnevno održavanje isplativije je od periodičnog detaljnog održavanja i korisnije je za podnu oblogu.		

Format	Veličina	Količina po kutiji	Coverage po kutiji
Ploča	Size Mix	30	3.34m²
	203.2mm x 1524mm	11	3.41m²
	304.8mm x 914.4mm	12	3.34m²
	457.2mm x 914.4mm	8	3.34m²
	609.6mm x 609.6mm	9	3.34m²

Expona Commercial PUR

184.2mm x 1219.2mm



Oiled Oak **4098**   LRV 28



Everglade Oak **4101**   LRV 25



Sherwood Oak **4099**   LRV 19



Red Heritage Cherry **4066**  LRV 13



Roasted Oak **4079**  LRV 15



Grey Heritage Cherry **4064**  LRV 10

184.2mm x 1524mm



French Vanilla Oak **4058**   LRV 38



Shoreline Oak **4078** LRV 30



Saffron Oak **4057**   LRV 18



Grey Barnwood **4108**  LRV 38



Natural Barnwood **4107**  LRV 45



Wild Teak **4102**  LRV 21

203.2mm x 1524mm



Grey Salvaged Wood **4104**  LRV 33



Blue Salvaged Wood **4103**  LRV 36



Bronzed Salvaged Wood **4106**  LRV 29

LRV - Light Reflectance Value

 Oborehni ivica

 Varijacija boje / šare

152.4mm x 1219.2mm



White Ash **4021** LRV 46



Light Classic Oak **4085** LRV 33



Honey Classic Oak **4086** LRV 23



Amber Classic Oak **4087** LRV 22



Honey Ash **4022** LRV 25



Dark Classic Oak **4088** LRV 16



Warm Ash **4023** LRV 12



Light Varnished Wood **4071** LRV 36



Beige Varnished Wood **4069** LRV 35



Grey Ash **4020** LRV 28



Grey Pine **4063** LRV 21

203.2mm x 1219.2mm



Blond Limed Oak **4081** LRV 34



Natural Brushed Oak **4031** LRV 26



Golden Chevron Parquet **4111*** LRV 28



Antique Oak **4016** LRV 16



Tanned Chevron Parquet **4112*** LRV 11



Dark Brushed Oak **4030** LRV 10



Brown Weathered Spruce **4072** LRV 15



Grey Limed Oak **4082** LRV 25



Silvered Driftwood **4014** LRV 19



Dark Limed Oak **4083** LRV 11

Mix Veličina

Ploče se isporučuju u 3 širine i u raznim kombinacijama boja, 36 ploča u kutiji

76.2/101.6/152.4mm x 914.4mm



Dark Recycled Wood **4067** LRV 10/13/27



Blue Recycled Wood **4068** LRV 11/18/33

101.6mm x 914.4mm



Classic Oak **1902** LRV 27



Nut Tree **1907** LRV 28



Vintage Timber **4091** LRV 17



Endgrain Woodblock **4109** LRV 17

152.4mm x 914.4mm



White Oak **4037** LRV 49



Light Elm **4034** LRV 25



Blond Country Plank **4017** LRV 34



French Nut Tree **4008** LRV 16



Walnut **4089** LRV 11



Weathered Country Plank **4019** LRV 13



Aged Elm **4036** LRV 9



Smoked Beam **4033** LRV 40



Burnt Beam **4032** LRV 16



Black Elm **4035** LRV 9

*Pack includes both left and right patterns

Sevelled Edges

Colour/Pattern Variation

LRV - Light Reflectance Value

Oborenih ivica

Varijacija boje / šare

Expona Commercial PUR

609.6mm x 609.6mm



Alabaster Stone **5065** LRV 56



Porta Stone **5066** LRV 53



Fossil Stone **5079** LRV 29



Black Textile **5077** LRV 16



Light Grey Concrete **5067** LRV 34



Warm Grey Concrete **5064** LRV 22



Cool Grey Concrete **5068** LRV 23




Dark Grey Concrete **5069** LRV 14



Arctic Mosaic **5094*** LRV 59



Clay Mosaic **5093*** LRV 49



Granite Mosaic **5095*** LRV 8



Liquorice Parchment **5106*** LRV 13

203.2mm x 1524mm



Painted Cement **5054** LRV 46



Raw Cement **5055** LRV 34



Crystal Parchment **5105*** LRV 43

Expona Commercial PUR

457.2mm x 914.4mm



Bister **5099** LRV 52



Distressed Gold Plate **5096** LRV 36



Industrial Steel **5101** LRV 18



Rusted Metal **5098** LRV 16



Distressed Copper Plate **5097** LRV 41



Iron Ore **5102** LRV 10

304.8mm x 914.4mm



Dovetail Slate **5058** LRV 29



Light Contour **5045** LRV 40



Dark Contour **5046** LRV 10



Urban Slate **5057** LRV 10



India Ink Slate **5056** LRV 6

152.4mm x 609.6mm / 304.8mm x 609.6mm / 304.8mm x 304.8mm

Frosted Marble **5104** LRV 50

Amazonian Slate **5059** LRV 13

Mix Veličina

Ploče se isporučuju u 3 širine i u raznim kombinacijama boja, 30 ploča u kutiji

12 ploča od 152.4mm x 609.6mm
12 ploča od 304.8mm x 304.8mm
6 ploča od 304.8mm x 609.6mm

*No pattern repeat

LRV - Light Reflectance Value


Bevelled Edges

Colour/Pattern Variation

LRV - Light Reflectance Value

Oborehnih ivica

Varijacija boje / šare

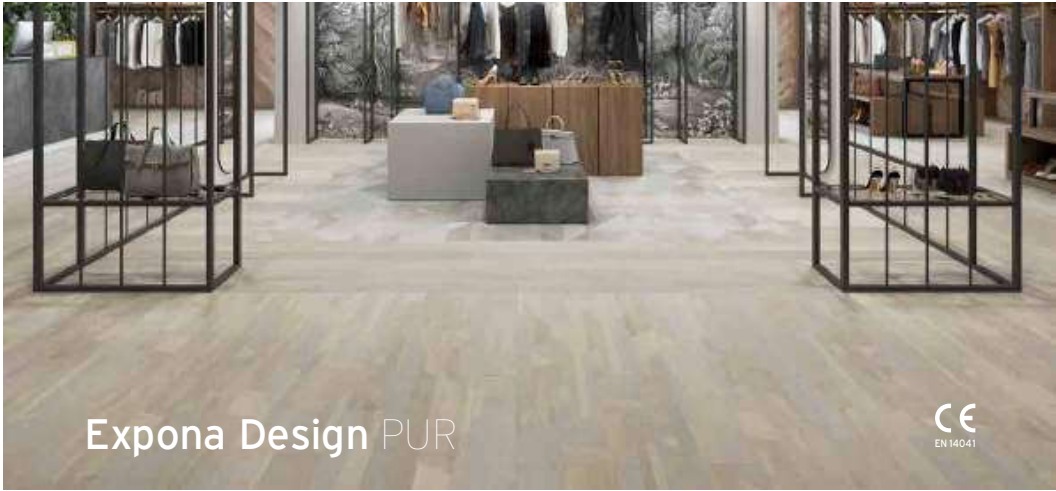

Expona Design PUR



Tehnička specifikacija

Format proizvoda		
Debljina	ISO 24346 (EN 428)	3.0mm
Debljina habajućeg sloja	ISO 24340 (EN 429)	0.70mm
Ukupna težina	ISO 23997 (EN 430)	5100g/m²
Površinski tretman	PUR	
Tehničke performanse		
General Performance	ISO 10582 (EN 649)	Conforms
Klasifikacija	ISO 10874 (EN 685)	23, 34, 43
Otpornost na klizanje	EN 13893 DIN 51130	Class DS R10
Sadržaj veziva	ISO 10582	Type I
Otpornost na habanje	EN 649	Group T
Reakcija na vatru	EN 13501-1 CAN/ULC S102.2	Class Bfl-S1 FSV < 300; SDV < 500
Elektrostatička otpornost	EN 1815	≤2.0kV Classified as 'antistatic'
Zaostala ulegnuća	ISO 24343-1 (EN 433)	≤0.05mm
Otpornost na točkice stolica	ISO 4918 (EN 425)	Pogodno
Dimenzionalna stabilnost	ISO 23999 (EN 434)	≤0.1% max
Podno grejanje	Pogodno, max 27°C	
Postojanost boje - svetlost	ISO 105-B02 (Method 3)	>6 —

Veličina daski i ploča

Format	Veličina	Količina po kutiji	Pokrivenost po kutiji
Plank	152.4mm x 914.4mm	24	3.34m²
	203.2mm x 1219.2mm	14	3.46m²
	184.2mm x 1524mm	12	3.37m²
	203.2mm x 1524mm	11	3.41m²

Održivost i uticaj na kvalitet vazduha		
BRE Green Guide	A+ ENP 429	
GreenTag	LCA Rate Gold Plus	GreenRate level A
Specific EN 15804 EPD	Available	
Recyclable	100%	
Recycled Content	40%	
REACH	Compliant	
Indoor Air Comfort Gold	Eurofins certified product	
FloorScore	Certified	
Finnish M1	Certified	
AqBB/ABG	Pass	
Responsible Sourcing	BES 6001	Very good
	SA 8000	Approved factory
Akustične performanse		
Smanjenje zvuka udara	ISO 10140-3	3dB

Performanse održavanja		
Otpornost na hemikalije	ISO 26987 (EN 423)	Dobra otpornost
Redovno dnevno održavanje isplativije je od periodičnog detaljnog održavanja i korisnije je za podnu oblogu.		

Format	Size	Količina po kutiji	Pokrivenost po kutiji
Ploča	609.6mm x 609.6mm	9	3.34m²
	304.8mm x 609.6mm	18	3.34m²
	304.8mm x 914.4mm	12	3.34m²
	457.2mm x 914.4mm	8	3.34m²
	914.4mm x 914.4mm	6	5.01m²
	609.6mm x 1219.2mm	6	4.46m²

203.2mm x 1524mm



Salvaged Pier Timber **9048*** LRV 57/14/43



Rustic Spiced Timber **9047*** LRV 48/8/40



Whiskey Barrel Timber **9049*** LRV 41/13/28



Reclaimed Inked Oak **9051*** LRV 33/20/13

184.2mm x 1524mm



Pacific Oak **9041** LRV 47



Parkside Oak **9039** LRV 31



Mango Oak **9042** LRV 22



Promenade Oak **9038** LRV 25



Coral Medley **9126** LRV 48



Smoked Medley **9125** LRV 27



Sepia Medley **9127** LRV 27

*Svaki dezen sadrži 6 dasaka u sledećim nijansama



203.2mm x 1219.2mm



Silvered Driftwood **6146** LRV 19



Natural Brushed Oak **6179** LRV 23

152.4mm x 914.4mm



Light Elm **6182** LRV 25

LRV - Light Reflectance Value

Oborehni ivica

Varijacija boje / šare

304.8mm x 609.6mm



Monochrome Geotexture **9148**
LRV 39



Cream Geotexture **9147**
LRV 58



Atlantic Slate **7154**
LRV 13

609.6 x 609.6mm



Grey Stencil Concrete **9139**
LRV 38



Rusted Stencil Concrete **9141**
LRV 24



Cool Grey Concrete **7237**
LRV 22

304.8 x 914.4mm



Silverline Slate **9145**
LRV 24



Charcoal Slate **9146**
LRV 7

457.2 x 914.4mm



Black Treadplate **8122**
LRV 12

609.6 x 1219.2mm



Frosted Cement **9134**
LRV 63



Wet Cement **9135**
LRV 45



Subway Cement **9133**
LRV 27



Factory Cement **9137**
LRV 16

914.4mm x 914.4mm



Pearl Stone **9128**
LRV 42



Medina Stone **9131**
LRV 18



African Blue Stone **9132**
LRV 11

V - Light Reflectance Value



LRV - Light Reflectance Value





Expona Domestic PUR

Tehnička specifikacija

Format proizvoda

Debljina	ISO 24346 (EN 428)	2.0mm
Debljina habajućeg sloja	ISO 24340 (EN 429)	0.40mm
Ukupna težina	ISO 23997 (EN 430)	3,680g/m ²
Površinski tretman	PUR	

Tehničke performanse

Osnovne performanse	EN 16511	Ispinjava
Klasifikacija	ISO 10874 (EN 685)	23, 32
Otpornost na klizanje	EN 13893 DIN 51130	Class DS R10
Sadržaj veziva	ISO 10582	Tip I
Otpornost na habanje	EN 649 EN 13329 Annex E	Group T ≥ 4000 cycles, Type 1
Reakcija na vatru	EN 13501-1 CAN/ULC S102.2	Class Bfl-S1 FSV < 300; SDV < 500
Zaostala ulegnuća	ISO 24343-1 (EN 433)	≤0.05mm
Otpornost na točkice stolica	ISO 4918 (EN 425)	Pogodno
Dimenzionalna stabilnost	ISO 23999 (EN 434)	<0.1%
Termička otpornost	ISO 12677	0.034m ² K/W
Podno grejanje	Pogodno, max 27°C	
Postojanost boje - svetlost	ISO 105-B02	(Metod 3) ≥6

Veličina daski i ploča

Format	Veličina	Količina po kutiji	Pokrivenost po kutiji
Dasko	76,2 x 228,6mm	192	3,34 m ²
	101,6 x 609,6mm	18	3,34 m ²
	152,4 x 914,4 mm	24	3,34 m ²
	101,6 x 914,4 mm	36	3,34 m ²
	152,4 x 1219,2mm	18	3,34 m ²
	184,2 x 1219,2mm	15	3,37 m ²
	203,2 x 1219,2mm	14	3,46 m ²

Održivost i uticaj na kvalitet vazduha

Recyclable	100%	
Recycled Content	15%	
REACH	Compliant	
Indoor Air Comfort Gold	Eurofins certified product	
AgBB/ABG	Pass	
Responsible Sourcing	SA 8000	Approved factory

Akustične performanse

Smanjenje zvuka udara	ISO 10140-3	2dB
-----------------------	-------------	-----

Performanse održavanje

Otpornost na hemikalije	ISO 26987 (EN 423)	Dobra otpornost
* Otpornost zavisi od koncentracije i vremena izlaganja. U slučaju pojačanog uticaja ulja, masti, kiselina, alkalija i drugih agresivnih hemikalija, kontaktirajte nas.		
Redovno dnevno održavanje isplativije je od periodičnog detaljnog održavanja i		

Format	Veličina	Količina po kutiji	Pokrivenost po kutiji
Ploče	304,8 x 304,8mm	36	3,34 m ²
	304,8 x 609,6mm	54	3,34 m ²
	609,6 x 609,6mm	9	3,34 m ²

Expona Domestic PUR



5822
Set: NATURAL - N4
S. / P. 26



5869
Set: PURE - P11
S. / P. 73, 80



5865
Set: PURE - P7
S. / P. 66, 72



5848
Set: PURE - P1
S. / P. 68



5849
Set: PURE - P3
S. / P. 70



5991
Set: NATURAL - N6
S. / P. 26



5867
Set: PURE - P9
S. / P. 67, 72, 80



5866
Set: PURE - P8
S. / P. 72



5868
Set: PURE - P10
S. / P. 73, 80



5861
Set: PURE - P2
S. / P. 62, 63, 69



5824
Set: NATURAL - N1
S. / P. 12, 13, 24



5982
Set: NATURAL - N2
S. / P. 14, 24



5826
Set: NATURAL - N3
S. / P. 25, 79



5828 / 5829
Set: NATURAL - N9 / N7
S. / P. 17, 28 / 16, 27




5962
Set: NATURAL - N8
S. / P. 27



5832
Set: NATURAL - N12
S. / P. 21, 29, 78



5827
Set: PURE - N11
S. / P. 20, 28




5975
Set: NATURAL - N13
S. / P. 22, 23, 29



5950
Set: NATURAL - N14
S. / P. 29



5834 / 5835
Set: CLASSIC - C4 / C1
S. / P. 43, 79 / 34, 42, 79, 82



5961
Set: CLASSIC - C17
S. / P. 37, 49



5953
Set: CLASSIC - C2
S. / P. 42



5836
Set: CLASSIC - C5
S. / P. 38, 39, 44



5821
Set: CLASSIC - C6
S. / P. 44, 78



5951
Set: CLASSIC - C3
S. / P. 43



5819
Set: CLASSIC – C15
S. / P. 32, 33, 49, 82



5833
Set: INTENSIVE – I5
S. / P. 58



5968
Set: CLASSIC – C8
S. / P. 46



5963
Set: CLASSIC – C9
S. / P. 46



5837
Set: CLASSIC – C7
S. / P. 45, 78



5823
Set: NATURAL – N5
S. / P. 15, 26



5825
Set: INTENSIVE – I4
S. / P. 54, 55, 57



5844
Set: INTENSIVE – I3
S. / P. 57



5831
Set: NATURAL – N10
S. / P. 18, 19, 28



5967
Set: INTENSIVE – I1
S. / P. 56



5846
Set: INTENSIVE – I8
S. / P. 59



5847
Set: INTENSIVE – I6
S. / P. 58



5845
Set: INTENSIVE – I2
S. / P. 52, 53, 56



5979
Set: INTENSIVE – I7
S. / P. 59



5863
Set: PURE – P4
S. / P. 64, 70, 80, 81



5988
Set: CLASSIC – C16
S. / P. 36, 49



5838 / 5839
Set: CLASSIC – C14 / C12
S. / P. 41 / 48



5841
Set: CLASSIC – C10
S. / P. 40, 46



5842
Set: CLASSIC – C11
S. / P. 47



5843
Set: CLASSIC – C13
S. / P. 35, 48



5862
Set: PURE – P6
S. / P. 65, 71, 80, 81, 83



5864
Set: PURE – P5
S. / P. 71, 81

LRV - Light Reflectance Value

Oborenih ivica

Varijacija boje / šare





Cavalio 0.3 PU



Tehnička specifikacija

Format proizvoda		
Debljina	ISO 24346 (EN 428)	2.0mm
Debljina habajućeg sloja	ISO 24340 (EN 429)	0.30mm
Ukupna težina	ISO 23997 (EN 430)	3600g/m²
Površinski tretman		PUR
Tehničke performanse		
General Performance	ISO 10582 (EN 649)	Ispunjava
Klasifikacija	ISO 10874 (EN 685)	23, 31
Otpornost na klizanje	EN 13893 DIN 51130	Class DS R10
Sadržaj veziva	ISO 10582	Type I
Otpornost na habanje	EN 649	Group T
Reakcija na vatru	EN 13501-1 CAN/ULC S102.2	Class Bfl-S1 FSV < 300; SDV < 500
Elektrostatička otpornost	EN 1815	≤2.0kV Classified as 'antistatic'
Zaostala ulegnuća	ISO 24343-1 (EN 433)	≤0.05mm*
Otpornost na točkice stolica	ISO 4918 (EN 425)	Pogodno
Dimenzionalna stabilnost	ISO 23999 (EN 434)	≤0.1% max
Podno grejanje		Pogodno, max 27°C
Postojanost boje - svetlost	ISO 105-B02	>6

*Prosečno testirano u trenutnoj proizvodnji.

Veličina daski i ploča

Format	Veličina	Količina po kutiji	Pokrivenost po kutiji
Daske	152.4mm x 914.4mm	24	3.34m²
	152.4mm x 1219.2mm	18	3.34m²
	184.2mm x 1219.2mm	15	3.37m²

Održivost i uticaj na kvalitet vazduha		
BRE Green Guide		A+ ENP 429
GreenTag	LCA Rate Gold Plus	GreenRate level A
Generic EN 15804 EPD		Available
Recyclable		100%
Recycled Content		40%
REACH		Compliant
Indoor Air Comfort Gold		Eurofins certified product
FloorScore		Certified
Finnish M1		Certified
AqBB/ABG		Pass
Responsible Sourcing	BES 6001	Very good
	SA 8000	Approved factory

Akustične performanse		
Smanjenje zvuka udara	ISO 10140-3	2dB
Performanse održavanje		
Otpornost na hemikalije	ISO 26987 (EN 423)	Dobra otpornost
Redovno dnevno održavanje isplativije je od periodičnog detaljnog održavanja i korisnije je za podnu oblogu.		

Format	Veličina	Količina po kutiji	Pokrivenost po kutiji
Ploča	304.8mm x 609.6mm	18	3.34m²
	152.4mm x 914.4mm	24	3.34m²

152.4mm x 914.4mm



Grey Ash 3027



Classic Oak, 3025



Classic Oak 3032



Rustic Oak, gold 3046

152.4mm x 1219.2mm



Driftwood, light 3489

184.2mm x 1219.2mm



Limed Oak, honey 3492



Nordic Oak, honey 3496



Country Oak, blond 3477

184.2mm x 1219.2mm



Vintage Oak, grey 3474



Nordic Oak, white 3497



Grey Beam 3499



Weathered Ash 3494



Limed Oak, grey 3037



Limed Oak, brown 3038



Washed Pine, dark 3504



Vintage Oak, brown 3472



Chestnut Oak 3035

LRV - Light Reflectance Value

Micro oborenih ivica

Varijacija boje / šare

Cavalio 0.3 PU

304.8mm x 609.6mm



Chalked Limestone 3556



Natural Sandstone 3051



Organic Limestone 3555



Scottish Slate 3057



Grey Slate 3053

152.4mm x 914.4mm



Warm Grey Cement 3507



Light Grey Cement 3508





Cavalio 0.55 PU

Tehnička specifikacija

Format proizvoda		
Debljina	ISO 24346 (EN 428)	2.50mm
Debljina habajućeg sloja	ISO 24340 (EN 429)	0.55mm
Ukupna težina	ISO 23997 (EN 430)	4200g/m²
Površinski tretman	PU	
Tehničke performanse		
General Performance	ISO 10582 (EN 649)	Ispunjava
Klasifikacija	ISO 10874 (EN 685)	23, 33
Otpornost na klizanje	EN 13893 DIN 51130	Class DS R10
Sadržaj veziva	ISO 10582	Type I
Otpornost na habanje	EN 649	Group T
Reakcija na vatru	EN 13501-1 CAN/ULC S102.2	Class Bfl-S1 FSV < 300; SDV < 500
Elektrostatička otpornost	EN 1815	≥2.0kV Classified as 'antistatic'
Zaostala ulegnuća	ISO 24343-1 (EN 433)	≤ 0.05mm*
Otpornost na točkice stolica	ISO 4918 (EN 425)	Pogodno
Dimenzionalna stabilnost	ISO 23999 (EN 434)	≤0.1% max
Podno grejanje	Pogodno, max 27°C	
Postojanost boje - svetlost	ISO 105-B02	>6

*Prosečno testirano u trenutnoj proizvodnji.

Veličina daske i ploča

Format	Veličina	Količina po kutiji	Pokrivenost po kutiji
Daske	152.4mm x 914.4mm	24	3.34m²
	152.4mm x 1219.2mm	18	3.34m²
	184.2mm x 1219.2mm	15	3.37m²

Održivost i uticaj na kvalitet vazduha		
BRE Green Guide	A+ ENP 429	
GreenTag	LCA Rate Gold Plus	GreenRate level A
Generic EN 15804 EPD	Available	
Recyclable	100%	
Recycled Content	40%	
REACH	Compliant	
Indoor Air Comfort Gold	Eurofins certified product	
FloorScore	Certified	
Finnish M1	Certified	
AgBB/ABG	Pass	
Responsible Sourcing	BES 6001 SA 8000	Very good Approved factory

Akustične performanse		
Smanjenje zvuka udara	ISO 10140-3	2dB
Performanse održavanje		
Otpornost na hemikalije	ISO 26987 (EN 423)	Dobra otpornost
Redovno dnevno održavanje isplativije je od periodičnog detaljnog održavanja i korisnije je za podnu oblogu.		

Format	Veličina	Količina po kutiji	Pokrivenost po kutiji
Ploča	457.2mm x 914.4mm	8	3.34m

Vanilla Oak	2819
Vintage Oak, grey	2846
Grey Stained Pine	2841
Vintage Oak, dark grey	2838
Limed Oak, grey	2864
Washed Pine, grey	2836
Washed Pine, charcoal	2838
Washed Pine, brown	2837

* Bevelled PROJECTLINE designs should be paired with CONCEPTLINE Inlay Accessories

Limed Oak, light	2868
French Oak, blond	2834
Vintage Wood, beige	2872
Brushed Oak, medium	2865
Rustic Oak, brown	2842
Authentic Rustic Oak	2844
French Oak, smoked	2835
Wild Natural Oak	2833

LRV - Light Reflectance Value

Micro oborenih ivica

Varijacija boje / šare

Cavalio 0.55 PU

457.2mm x 914.4mm



Misted Concrete 2345



Industrial Concrete 2346



Original Concrete 7246



Black Metalstone 2326

152.4mm x 914.4mm



Driftwood, grey 1942



Classic Oak 2907




Driftwood, dark 1944



LVT Umetne trake / fuge

Istaknute fuge

Ove karakteristične trake donose podebljani izgled i na daskama i na pločama. Istaknite ključne tačke poda ili koristite metalni izgled za upečatljiv luksuzni finiš.

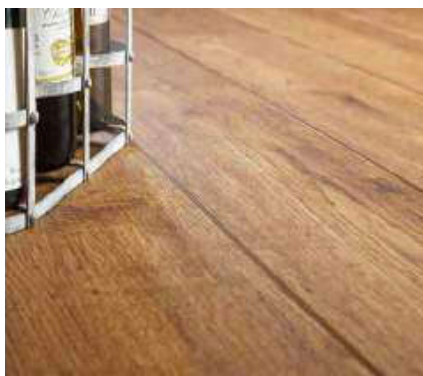

Brown Feature Strip with Vintage Timber.

Feature Strips

5mm x 1000mm

Silver			
2.0mm Gauge:	2.5mm Gauge:	3.0mm Gauge:	
0025	5100	0115	
Black			
2.0mm Gauge:	2.5mm Gauge:	3.0mm Gauge:	
0028	5103	0103	
Brown			
2.0mm Gauge:	2.5mm Gauge:	3.0mm Gauge:	
0031	5110	0114	
Gold			
2.0mm Gauge:			
			0026
Cream			
2.0mm Gauge:			
			0032

Fugne trake

Obično položene između kamenih pločica, trake za fuge mogu se koristiti kao suptilan dodatak boji u blizini ploča ili možete odabrati svetliju ili tamniju nijansu kako biste stvorili kontrastni efekat.



Ice Grouting Strip with Atlantic Slate.

Grouting Strips

3mm x 914mm

Ice		2.0mm Gauge:
		2031
Pearl		2.0mm Gauge:
		2033
Grey		2.0mm Gauge:
		2035
Coffee		2.0mm Gauge:
		2037
Graphite		2.0mm Gauge:
		2039

Grouting Strips

5mm x 914mm

Beige			
2.0mm Gauge:	2.5mm Gauge:	3.0mm Gauge:	
0037	2537	3037	
Grey			
2.0mm Gauge:	2.5mm Gauge:	3.0mm Gauge:	
0036	2536	3036	
Black			
2.5mm Gauge:	3.0mm Gauge:		
2538	3038		

Trake za intarzije

Idealno za polaganje između dasaka za izradu dizajna poput brodskih brodova, obodnih granica ili isticanja karakteristika sobe.



Classic Oak Marquetry Strip with White Limed Oak.

Marquetry Strips

3mm x 914mm

Maple		2.0mm Gauge:
		2056
Natural Oak		2.0mm Gauge:
		2057
Classic Oak		2.0mm Gauge:
		2058
Walnut		2.0mm Gauge:
		2059

Marquetry Strips

5mm x 914mm

Light Oak			2.5mm Gauge:	3.0mm Gauge:
			2551	3061
Mid Oak			2.5mm Gauge:	3.0mm Gauge:
			2552	3062
Walnut			2.5mm Gauge:	3.0mm Gauge:
			2553	3063

Trake sa drvenom teksturom

Posedujući prirodno drvenu teksturu, ove upadljive trake stvaraju poseban efekat kada se koriste pojedinačno ili u raznim kombinacijama.



Classic Oak and Walnut Cross Grain Marquetry Strips with Sienna Oak.

Cross Grain Marquetry Strips

10mm x 914mm

Classic Oak		2.0mm Gauge:
		1011
Walnut		2.0mm Gauge:
		1012

Cross Grain Marquetry Strips

25mm x 914mm

Classic Oak		2.0mm Gauge:
		2511
Walnut		2.0mm Gauge:
		2512